


Profiled Mineral Core – 60-Minute Fire Rating

Custom Door Components **60-minute banded and profiled** mineral core is ideal for garage-to-house residential openings, suite entrance doors in hotels and apartment buildings, and commercial applications where 60-minute fire compliance is required. Profiled mineral core is used in 1-3/4" finished doors and is machined to match all manufactured door face designs on the market, approved for heights up to 8'0".

Applications

- Commercial
- Suites in hotels and apartments
- Single and multi-unit residential units

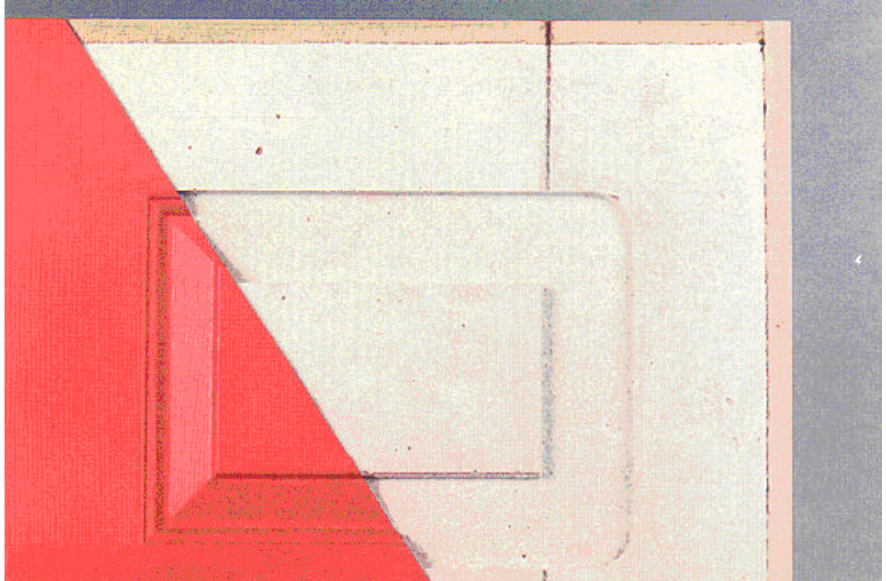


Approvals

Custom Door Components **60-minute banded and profiled** mineral cores are Warnock-Hersey approved, for neutral or positive pressure requirements, categories A & B.

Sizes Available

- Singles 2'0" through 3'6" X 7'0"
- Singles 3'0" X 8'0"
- Pairs to 7'0" X 7'0"
- Pairs to 6'0" X 8'0"

For special sizes, contact Custom Door Components.

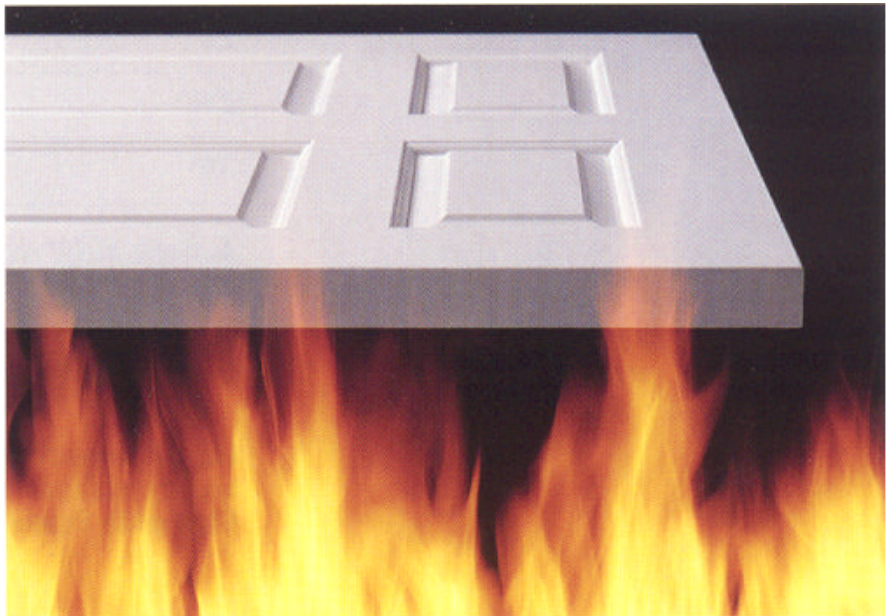

Service

Our centralized location provides you with short delivery time, and our inside sales staff provides the most prompt and concerned service available. For more information, please call toll free 1-800-826-4020 or 715-486-2404, fax 715-387-4218, or write Custom Door Components, 1401 East 4th Street, Marshfield, Wisconsin 54449. Visit our website at www.customdoorcomponents.com.